Interop QOS

2026-02-19-15-47-25

Objective

The objective of the QoS (Quality of Service) traffic throughput test is to measure the maximum achievable throughput of a network under specific QoS settings and conditions.By conducting this test, we aim to assess the capacity of network to handle high volumes of traffic while maintaining acceptable performance levels,ensuring that the network meets the required QoS standards and can adequately support the expected user demands.

Test Configuration	Device List	DESKTOP-DDPI3HE(Windows)
	Number of Stations	Total(10) Windows(1)
	AP Model	Test_DUT
	SSID	Test Configured
	Traffic Duration in hours	0.02
	Security	Test Configured
	Protocol	TCP
	Traffic Direction	Bi-direction
	TOS	['VI']
	Per TOS Load in Mbps	Upload:100.0 Mbps,Download:100.0 Mbps

Overall Bi-direction Throughput for all TOS i.e BK | BE | Video (VI) | Voice (VO)

No of Stations	Throughput for Load 100.0 Mbps-upload	Throughput for Load 100.0 Mbps-download
1	BK : 0.0, BE : 0.0, VI: 68.87, VO: 0.0	BK : 0.0, BE : 0.0, VI: 29.04, VO: 0.0

Overall Bi-direction throughput for 1 clients with different TOS.

The below graph represents overall Bi-direction throughput for all connected stations running BK, BE, VO, VI traffic with different intended loadsUpload:100.0 Mbps,Download:100.0 Mbps per tos

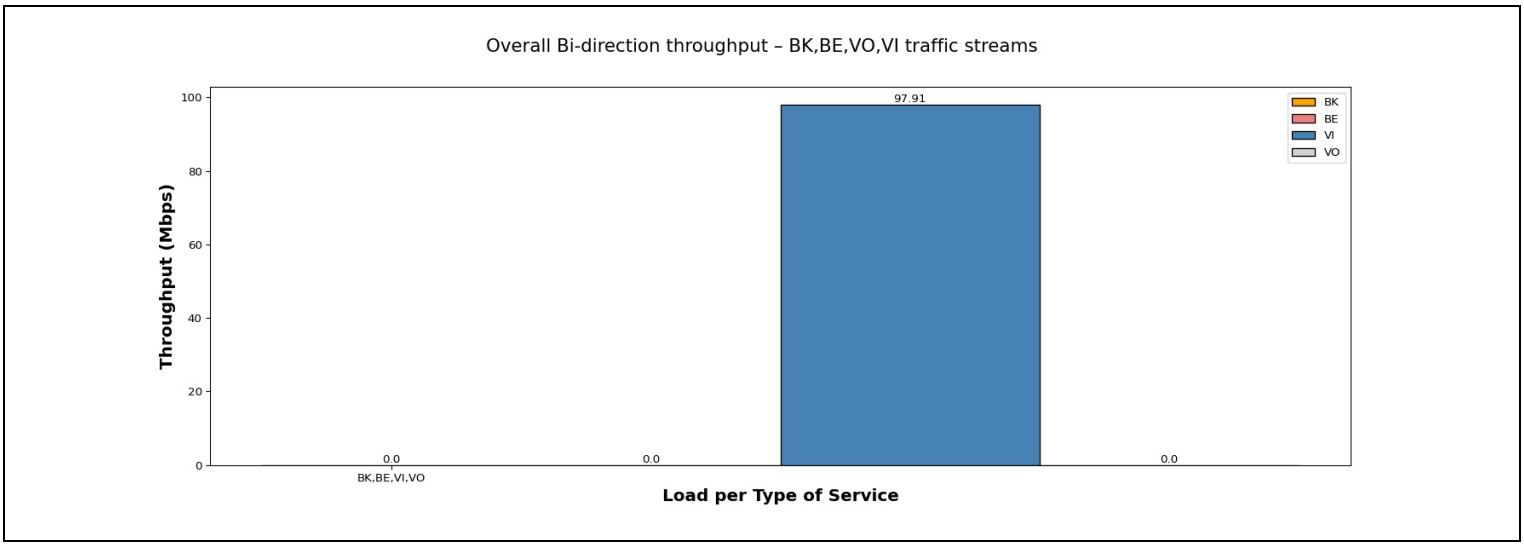

Individual Bi-direction throughput with intended load Upload:100.0 Mbps,Download:100.0 Mbps/station for traffic VI(WiFi).

The below graph represents individual throughput for 1 clients running VI (WiFi) traffic. X- axis shows “number of clients” and Y-axis shows “Throughput in Mbps”.

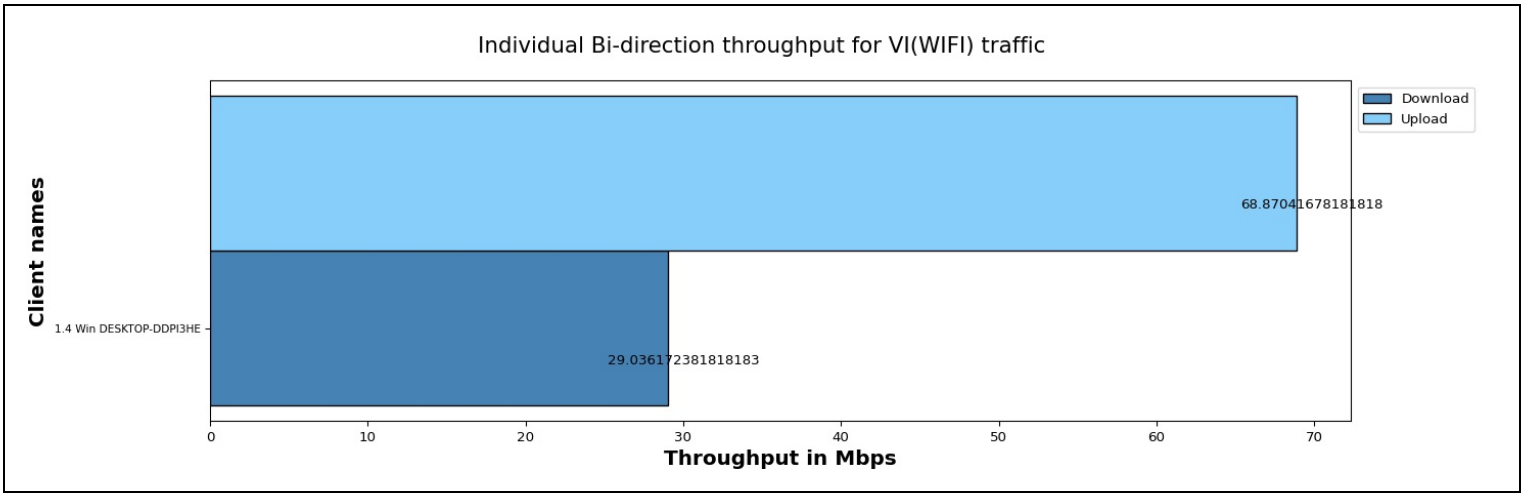

Client Name	MAC	SSID	Type of traffic	Offered upload rate	Offered download rate	Observed average upload rate	Observed average download rate	Observed Upload Drop (%)	Observed Download Drop (%)
1.4 Win DESKTOP-DDPI3HE	e4:a4:71:93:70:e7	NETGEAR_2G_wpa2	Video	100.0 Mbps	100.0 Mbps	68.87041678181818 Mbps	29.036172381818183 Mbps	0.006767	0.55747

Information	contact	support@candelatech.com